
# USER MANUAL

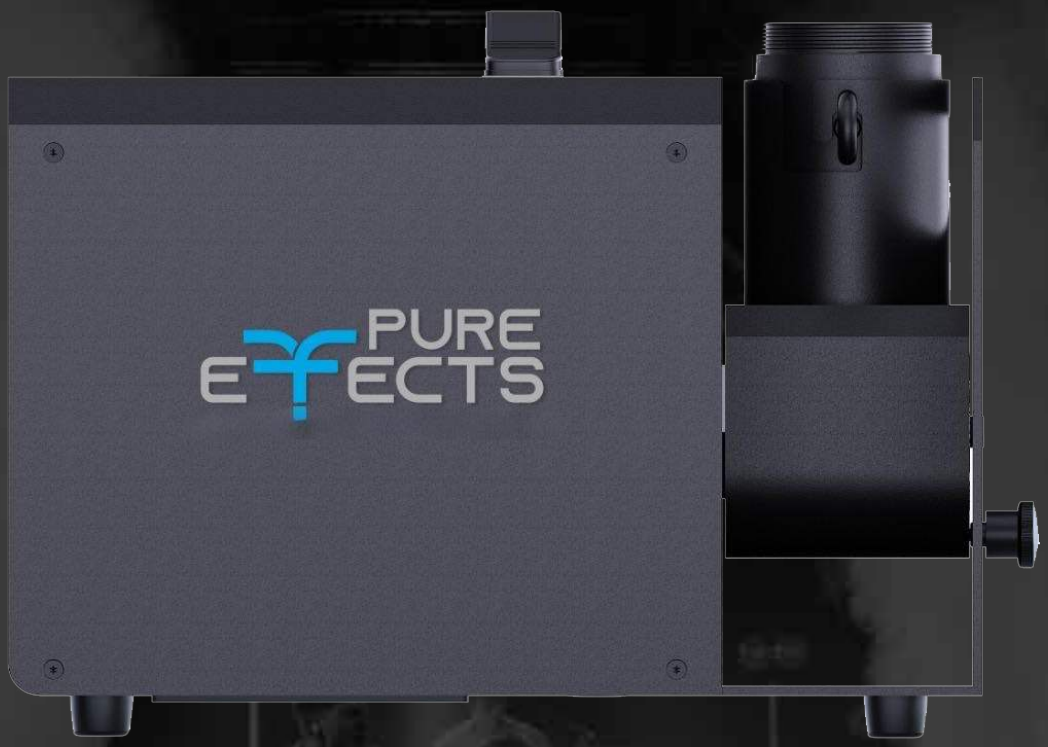


## CONFETTI SHOT

*V1.0 2026*


RoHS COMPLIANT

PURE EFFECTS
MANUFACTURING SPECIAL EFFECTS



# CONTENTS.


1. General information Page **1**
2. 2 Channel Modes Page **2**
3. 3 Channel Modes Page **2**
4. 4 Channel Modes Page **3**
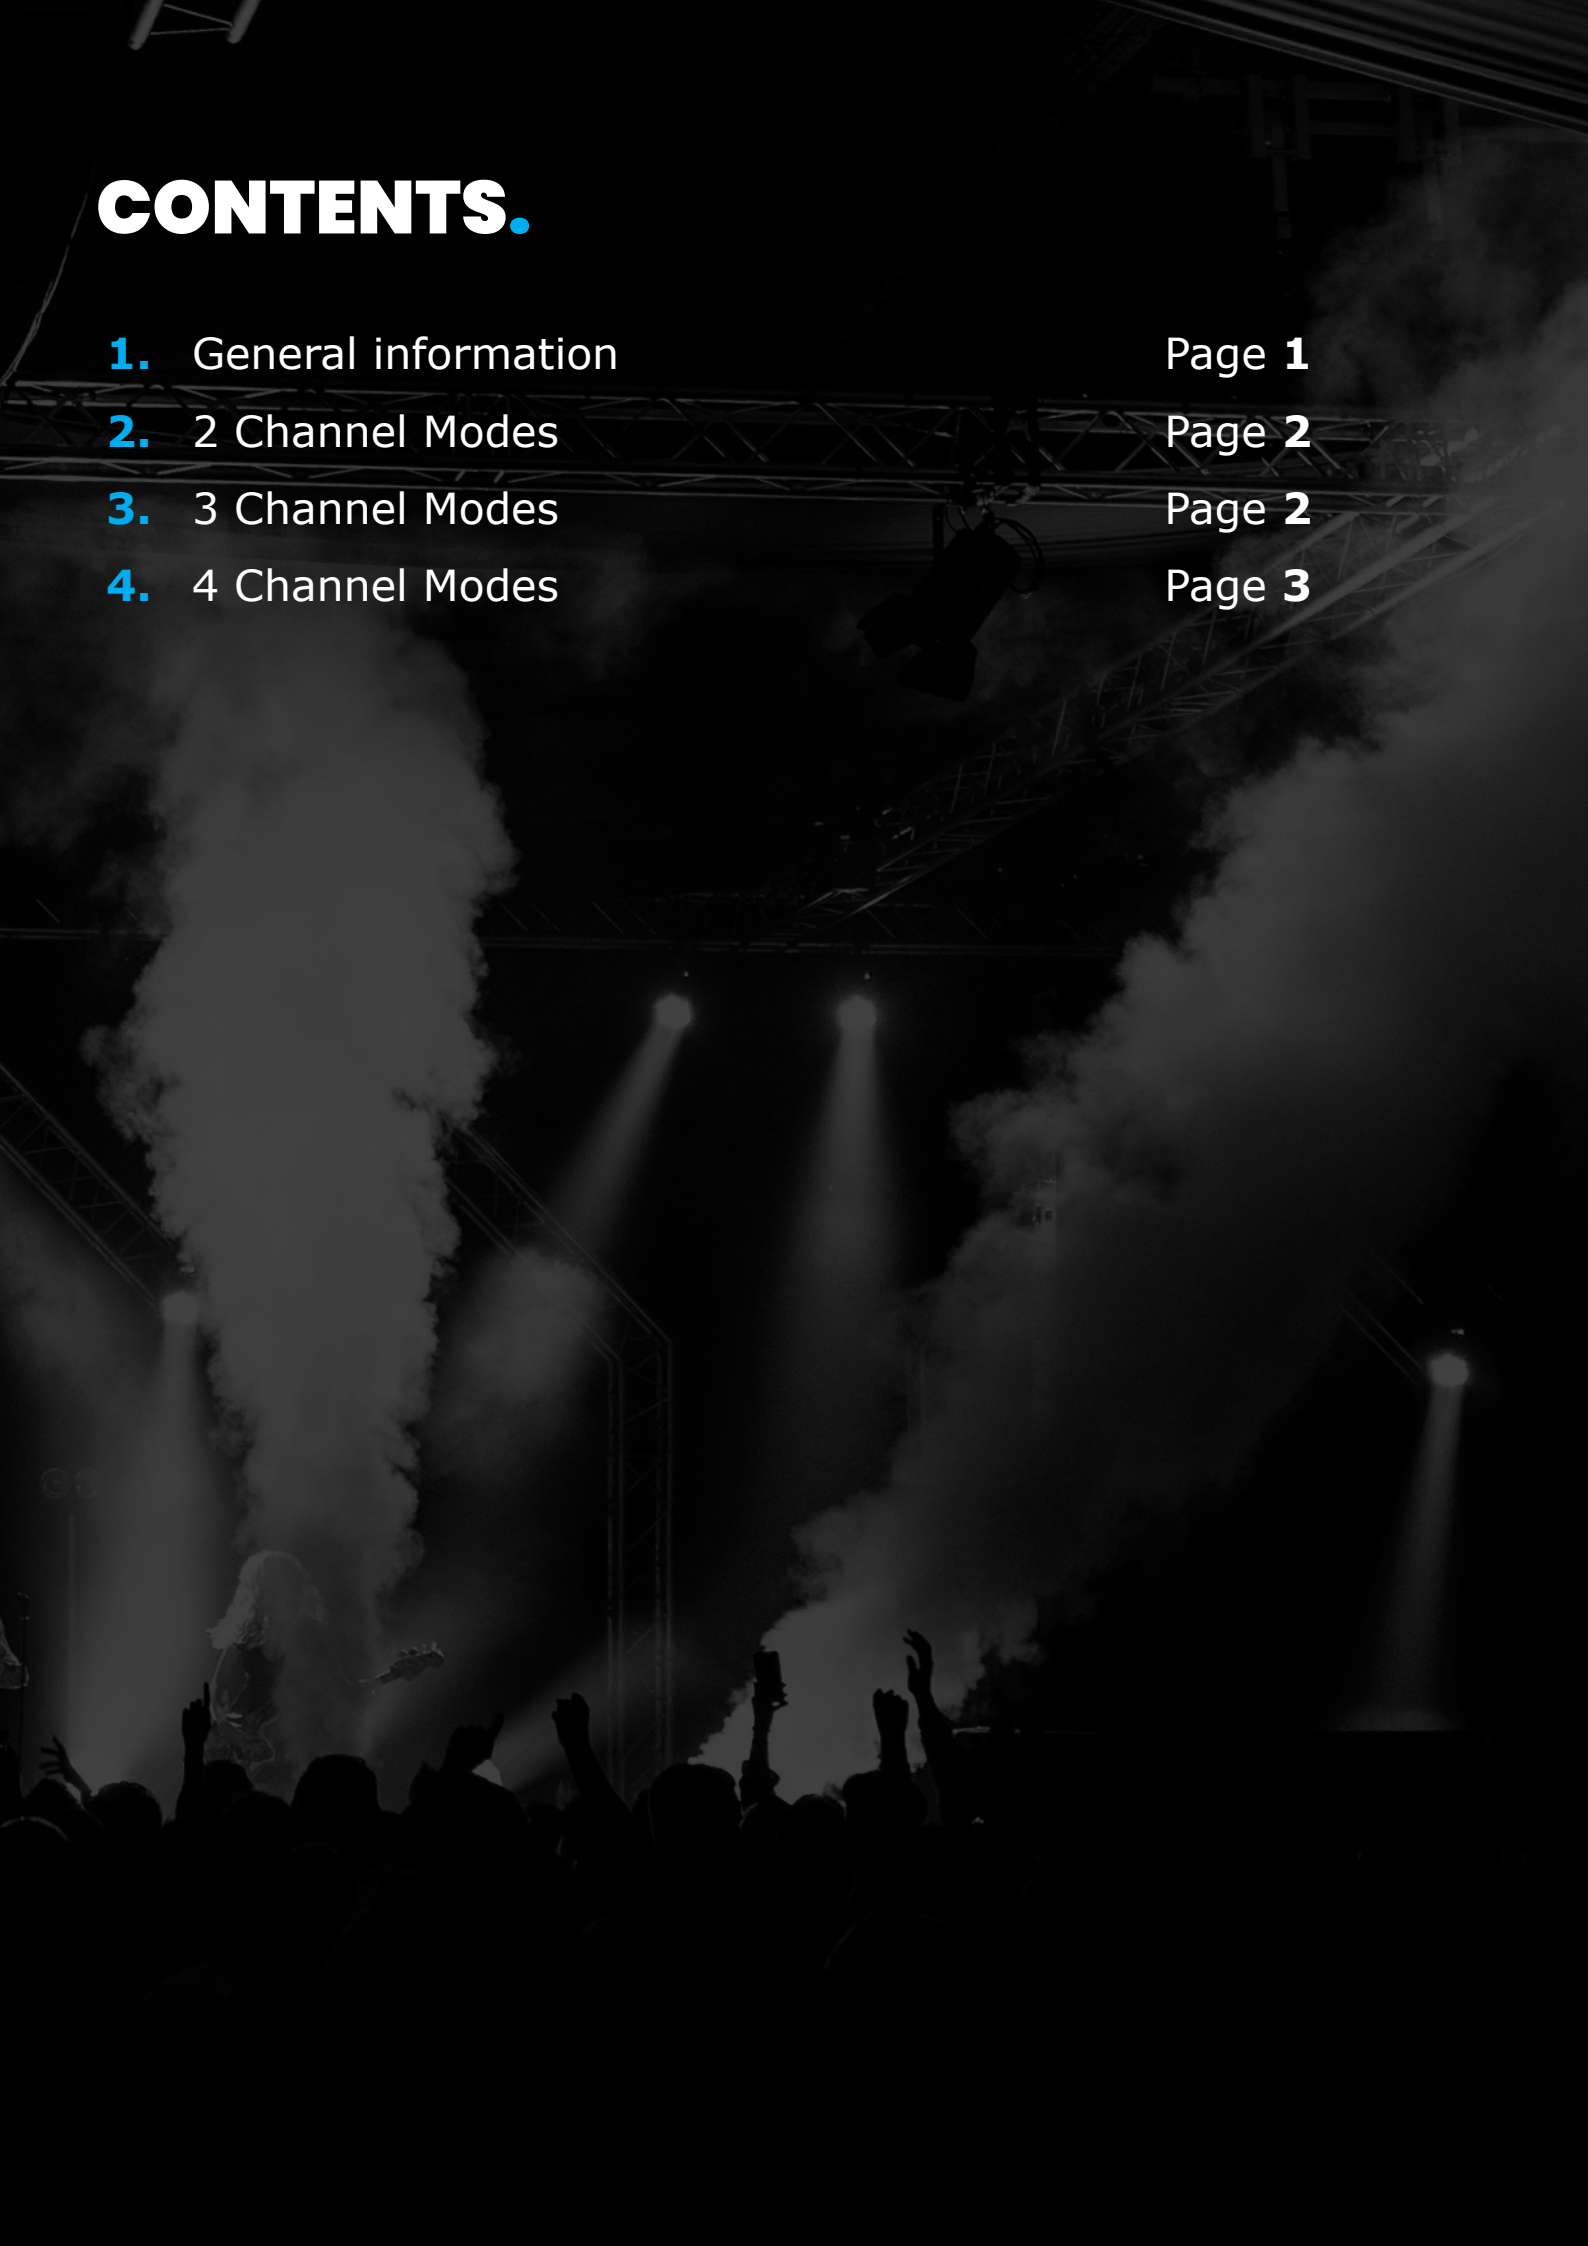
# USER MANUAL.

## 1. GENERAL INFORMATION

| | |
|---|---|
| **Voltage:** | AC 100—240V 50/60Hz |
| **Power:** | 100 W |
| **Inflation Time:** | 60 s |
| **Recommended Confetti Loading:** | 300 g |
| **Confetti Spray Height:** | 10m |
| **Ribbon Spray Height:** | 15m |
| **Adjustable Angle:** | 0–180° |
| **Adjustable Pressure:** | 4 bar/8 bar |
| **Control Mode:** | DMX512 |
| **Equipment Dimensions:** | 33 x 27 x 22 cm (excluding nozzle)<br>33 x 27 x 81 cm (including nozzle) |
| **Packaging Dimensions:** | 78 x 46 x 40 cm (including wheels) |
| **Net Weight:** | 13 kg (excluding nozzle) / 14.5 kg (including nozzle) |

## 2. TWO CHANNEL MODES

1. **Pressurization Channels:** 001, 50-200 - Pressurization enabled (0-49) and 201-255 - Pressurization disabled
2. **Activation Channels:** 002, 254-255 - Pressurization enabled (0-253) disabled

## 3. THREE CHANNEL MODES

1. **Pressurization Channels:** 001, 50-200 - Pressurization enabled (0-49) and 201-255 - Pressurization disabled
2. **Safety Channels:** 002, 100-155 - Safety channel open (0-99) and 156-255 - Safety channel closed
3. **Activation Channels:** 003, 254-255 - Pressurization enabled (0-253) disabled

## 4. FOUR CHANNEL MODES

1. **Pressurization channel 001:** 50-200 - Pressurization activated; 0-49 - Pressurization deactivated;
201-255 - Pressurization deactivate

2. **Activation channel 002:** 254-255 - Activation activated; 0-253 - Deactivated

3. **Running interval time 003:**
0-9 - Deactivated;
10-50 - 500ms;
50-100 - 600ms;
100-150 - 700ms;
150-200 - 800ms;
200-255 - 900ms

4. **Running effect 004:**
0-10 - Deactivated;
11-59 - Simultaneous spray;
60-108 - Running from left to right;
109-157 - Running from right to left;
158-206 - Running from both sides to the center Between, 207~255 from the middle to both sides


PURE
EFFECTS

PURE EFFECTS

MANUFACTURING SPECIAL EFFECTS

# CONTACT US



**Langstraat 10, 5827 BA Vortum-Mullem, the Netherlands**

+316 549 380 20 • www.pure-effects.eu • info@pure-effects.eu

commerce nummer 94502153 • V.A.T NR NL866800785B01

**ENJOY THE EFFECTS**